


# LUMISHADE

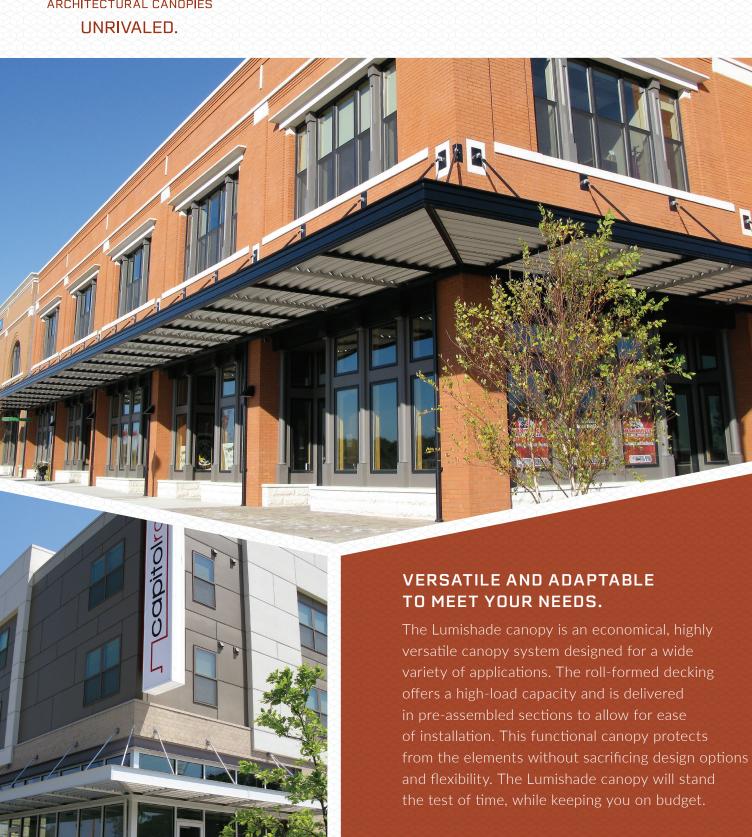

For more details, please visit mapes.com

## LUMISHADE TECHNICAL DATA

All Aluminum (T6 - 6063)

Fascia .125"

Decking .040" Roll-formed


Deflection rating L/180

Maximum Projection

10' w/ hanger rod supports

5' w/ cantilever supports

Note: Engineered stamped calcs available in all 50 states

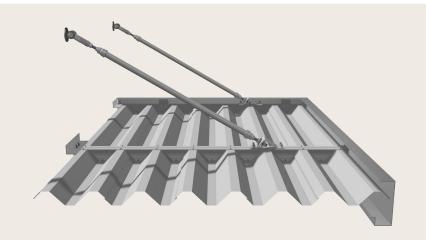

## **CANOPY DETAILS**

Finishes		Warranty		Application
Mapes Standard Finishes	Clear Anodized, White Baked Enamel, & Bronze Baked Enamel	1 year	Meets AAMA 2603 specifications	Factory applied
2-Coat Kynar*	25 stock colors w/ unlimited custom matching options	10 years	70% Fluoropolymer meets AAMA 2605 specifications	Professionally applied & cured by certified finisher

<sup>\*</sup>Additional lead times and costs associated w/ premium paints & custom color matching

## **FEATURES**

- .040 Roll-formed decking
- Economical
- High-load capacity
- Modular design
- Rust & maintenance free
- Custom details & colors
- Pre-assembled sections

#### **APPLICATIONS**


- Door & window covers
- Loading docks
- Parking garages
- Storefronts
- Passive solar
- Shopping centers

### **DECK OPTIONS**



.040 ROLL-FORMED ALUMINUM

#### **FASCIA OPTIONS**



8" C-CHANNEL



10" C-CHANNEL



12" C-CHANNEL



**EXTENSION** 




8" J WITH 4" **EXTENSION** 



12" SMOOTH FACE



## WALL MOUNT DETAILS



BRICK/BLOCK WITH THRU BOLT AND COMPRESSION SLEEVE



METAL BUILDING